



Pas Reform Egg setting system

To place hatching eggs point down in setter trays



Royal Pas Reform
Integrated Hatchery Solutions



Egg setting system

Placing hatching eggs on setter trays, with unsurpassed point down setting

Benefits


Solid, reliable system for placing eggs onto setter trays combines gentle egg handling with 99.7 per cent point down setting to maximize hatchability. Automatic setter tray destacking and loading pressure sensor to control egg infeed, as well as a double egg sensor to detect remaining eggs between the roller track and the cup conveyor. Eggs can be set both on matrix (SmartTray™ 150) and on honeycomb (SmartTray™ 162) structured trays. An extra tray denester for 30 egg trays can be supplied to repack the eggs after point down correction, for transport to other locations.

How it works

- Place eggs manually or automatically on the infeed conveyor
- Automatic infeed control sensors on the sides of the conveyor prevent the accumulation of eggs on the infeed conveyor
- Infeed gates detect every egg loaded into the system. When all the gates have detected an egg, the roller track moves one step forward, receiving the eggs from the gates between 2 roller shafts on the roller track
- A rotating movement during each step forward moves the eggs with their pointed ends towards the outside of the rollers
- At the end of the roller conveyor, tipping pins tip the eggs point down into the cups, while flaps guide the eggs
- The cup conveyor transports the eggs towards the transfer position until the first line of eggs is detected by the start transfer sensor
- The vacuum head on the transfer lever moves down to pick up the eggs and transports them towards an empty setter tray on the output conveyor
- If required, a special gate closing system can create various patterns of cups filled with eggs for special types of setter trays

Related products

- ▶ Vacuum egg lifter
- ▶ Egg loading system
- ▶ Egg grading system
- ▶ Candling booth for visual inspection
- ▶ Setter trolley loader
- ▶ SmartTray™ 150
- ▶ SmartTray™ 162

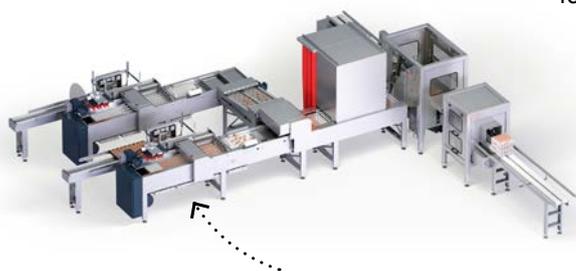

Technical Specifications

Capacity	> 30,000 eggs/hr
Accuracy	> 99.7% point down setting
Maximum egg size (LxD)	> 76 x 52 mm
Installed power	> 1.8 kW
Air Requirement	> 15 ltr/min at 8 bar
Material	> Stainless steel AISI304 (where applicable)
Dimensions	> 4100 x 1500 x 900 mm
Weight	> 500 Kg
IP Marking	> IP65



Royal Pas Reform

Integrated Hatchery Solutions

Bovendorpsstraat 11
7038 CH Zeddum
The Netherlands

Phone +31 314 659 111
info@pasreform.com
www.pasreform.com